



COMMERCIAL

# Tempo

Uniquely realistic, premium compact flooring





# Tempo

## Uniquely realistic, premium compact flooring

Redefine expectations with Tempo, featuring new, contemporary colours and the timeless beautiful textures of wood and stone.

Thanks to our market-leading technology, each of Tempo's plank designs, available in 20 cm and 16.7 cm widths, now boasts sharply embossed, **V-shaped groove outlines for a super-realistic effect – rivalling the look of luxury vinyl tiles.**

Other benefits include a long-lasting, **0.50 mm wear layer, Hyperguard+ PU protection** and an **embossed, black compact backing** that provides strength, durability and excellent residual indentation.

A high-quality choice for a range of commercial and residential applications, especially heavy-traffic areas, Tempo is easy to install, slip resistant, free of ortho-phthalates and comes with a **10-year warranty.**

INSPIRATION

# Fresh, warm colours



### Parker Oak

A plank in a beautiful shade of rich warm oak, adding depth and character to any interior scheme.

Parker Oak W48



### Caprera Oak

These 20 cm-wide planks are available in two distinguished yet subtle colours for understated style and luxury.

Caprera Oak W44

INSPIRATION

# Realistic plank designs

The look of LVT; the convenience of sheet vinyl



CHESTNUT OAK W37

## W-emboss

Our market-leading W-emboss is impressed by a cylinder during production, creating a deep, sharp, V-shaped groove along the length of each 20 cm plank. Only available in the Tempo range, its luxurious and realistic effect is unrivalled.



FOXTAIL PINE W92



ABRUZZO OAK V33

## V-emboss


New! Our unique V-emboss for 16.7 cm-wide planks, only in the Tempo range. An indented, V-shaped groove on all four sides creates a superbly realistic timber-flooring effect.

# Collection overview

WOOD




HERRINGBONE & HUNGARIAN POINT

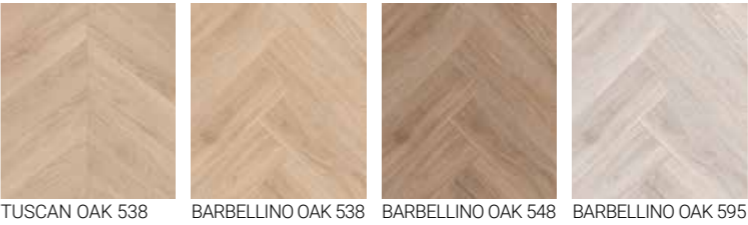

MATERIAL



## What makes Tempo unique?

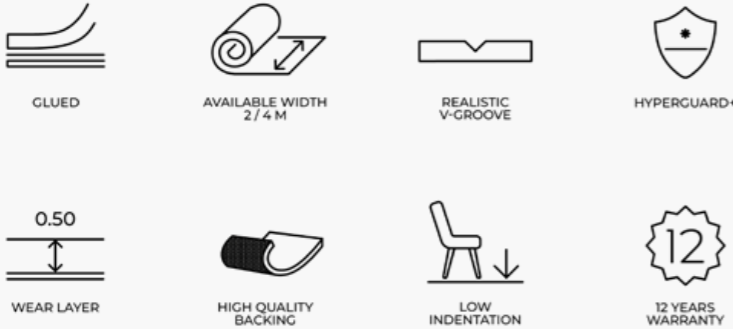

**Luxury black backing**

Our unique black compact backing features a sharp **quadrant emboss** and offers **strength, durability** and excellent **residual indentation**.


**Realistic V- & W-emboss**

V-shaped groove outlines for a super-realistic effect – rivalling the look of luxury vinyl tiles.





## Flooring built to last

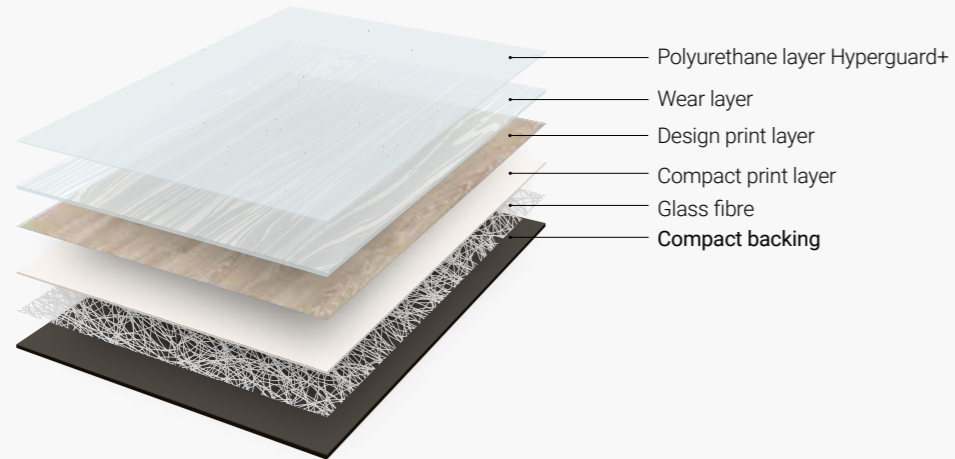

## Installation & maintenance

We offer a tailor-made service to help make the most of our high-quality products. For all our floors, we provide a guide containing all the necessary information for proper **installation, cleaning and maintenance**.

### Installation direction


Always follow the installation instructions about direction:

**REVERSE (B) ↑↓**

**DO NOT REVERSE (A) ↑↑**

**L= Left, R= Right**

The arrow on the back of a vinyl roll indicates the direction of production.



## Underfloor heating and cooling

### Thermal conductivity

Heterogeneous sheet vinyl is one of the best types of flooring to use with underfloor systems. And with a thermal conductivity of **0.130 W/(m.K)**, Tempo is an excellent choice for both underfloor heating and cooling.

Its very low thermal resistance means that heat and cold from the system below passes easily through the vinyl, ensuring a comfortable temperature in the


room. Because the room warms up or cools down faster, **energy consumption** is also reduced, making life more affordable.

Vinyl flooring also contributes to wellbeing by providing a **warm and comfortable surface underfoot**.



Consult and download our guides

# The importance of reflected light

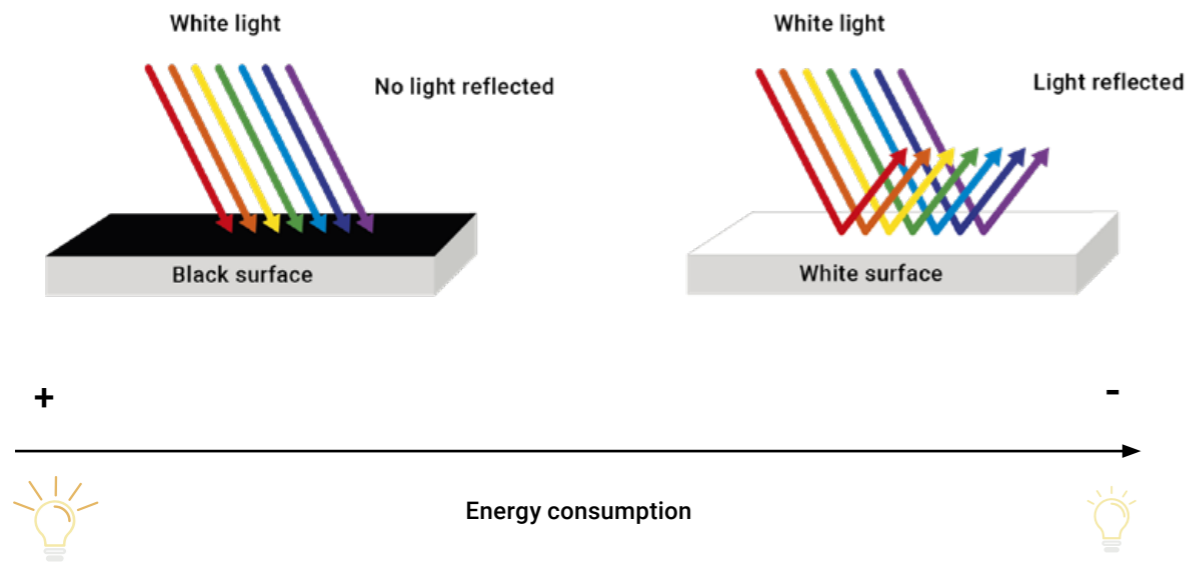

## What is LRV?

The amount of light that a surface reflects or absorbs is measured by a universal scale called **Light Reflectance Value, or LRV**. This is indicated by a percentage on a scale from 0 (a perfectly absorbent surface such as black) to 100 (a completely reflective, pure white surface).

In addition to its colour, the structure and finish of a product contributes to its LRV.

## Why is LRV important?

Brighter rooms need less artificial lighting, **reducing energy consumption**.

A balanced LRV is also beneficial for the **wellbeing** of residents. We offer a diverse collection with numerous designs and colours, making it easier to optimise the brightness in every room.



## Creating harmony

To ensure a balance of colours between the walls, floor and ceiling, their LRV indices should vary by **at least 30 points**, creating a **harmonious environment**.



# Flawless maintenance with **Hyperguard+**

Thanks to Hyperguard+, our specially developed protective top layer, Tempo floors are both easy to maintain and highly **resistant to stains and scratches**. This innovative surface treatment offers durability without compromising on design, and with the same technical characteristics in terms of acoustics and resistance. In short, Tempo is a **durable vinyl floor** that will retain its good looks for many years, even under heavy use.

No need for additional polishing, sealing, or waxing after installation.

No need for  
additional polishing,  
sealing or waxing  
after installation



## The tests



### Test principle (ISO 26987-2008)

Specified substances in liquid or paste form are placed on a test piece for defined periods and then removed. After cleaning has been carried out, the resulting change of appearance is assessed under specified lighting conditions.



### Duration of contact

2 hours



### Cleaning procedure

Each sample is washed with a cleaning agent (water + soap) before the final assessment.

## The results

### Internal test

- ✓ Mayonnaise
- ✓ Ketchup
- ✓ Mustard
- ✓ Chocolate
- ✓ Coffee
- ✓ Tea
- ✓ Milk
- ✓ Red wine
- ✓ Alcohol gel
- ✓ Isobetadine
- ✓ Shoe polish
- ✓ Lugol

### External test

- ✓ Desinfectant 2,5%
- ✓ Benzine
- ✓ Ammonia solution 10%
- ✓ Ethyl alcohol 48%
- ✓ Citric acid 10%

- ✓ not changed
- ! slightly changed
- ! moderately changed
- ✗ greatly changed

Tempo floors achieved the best possible scores in extensive stain tests using a variety of substances.



organic supply





Our welding rods are available in a wide variety of colours to match our floors

TECHNICAL INFORMATION

# Hot welding

ø 4 mm x 100 m length

We offer a wide range of welding rods for colour-matching or contrasting with our heterogenous sheet vinyl. Either way, the result will be a floor that is both strong and beautiful.

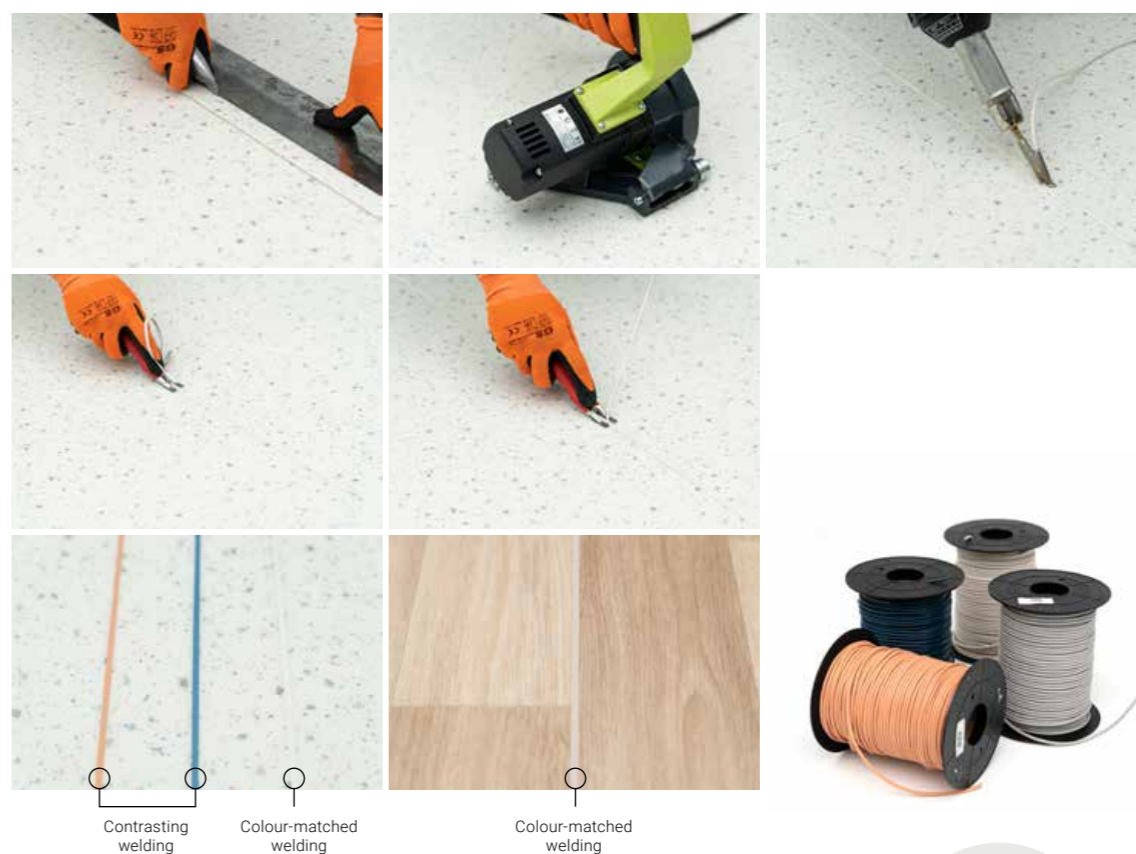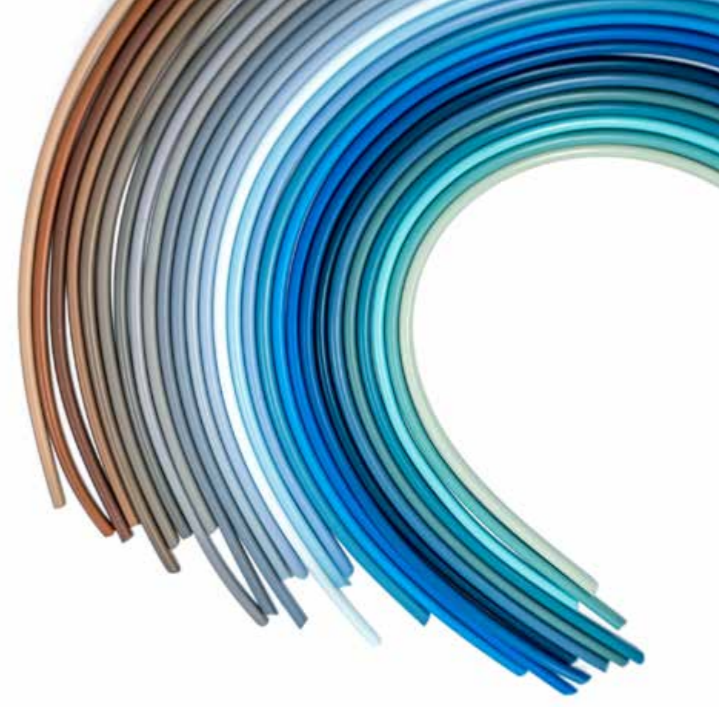

Contrasting welding

Colour-matched welding

Colour-matched welding




This is a summary of the full installation instructions. Scan for more details

TECHNICAL INFORMATION

# Cold welding Invisiweld

Invisiweld technology has the ability to achieve **an almost imperceptible join** with all IVC Commercial heterogeneous vinyl floor coverings. Fast, clean and easy to use, Invisiweld is economical and leaves a seamless, strong and watertight join.

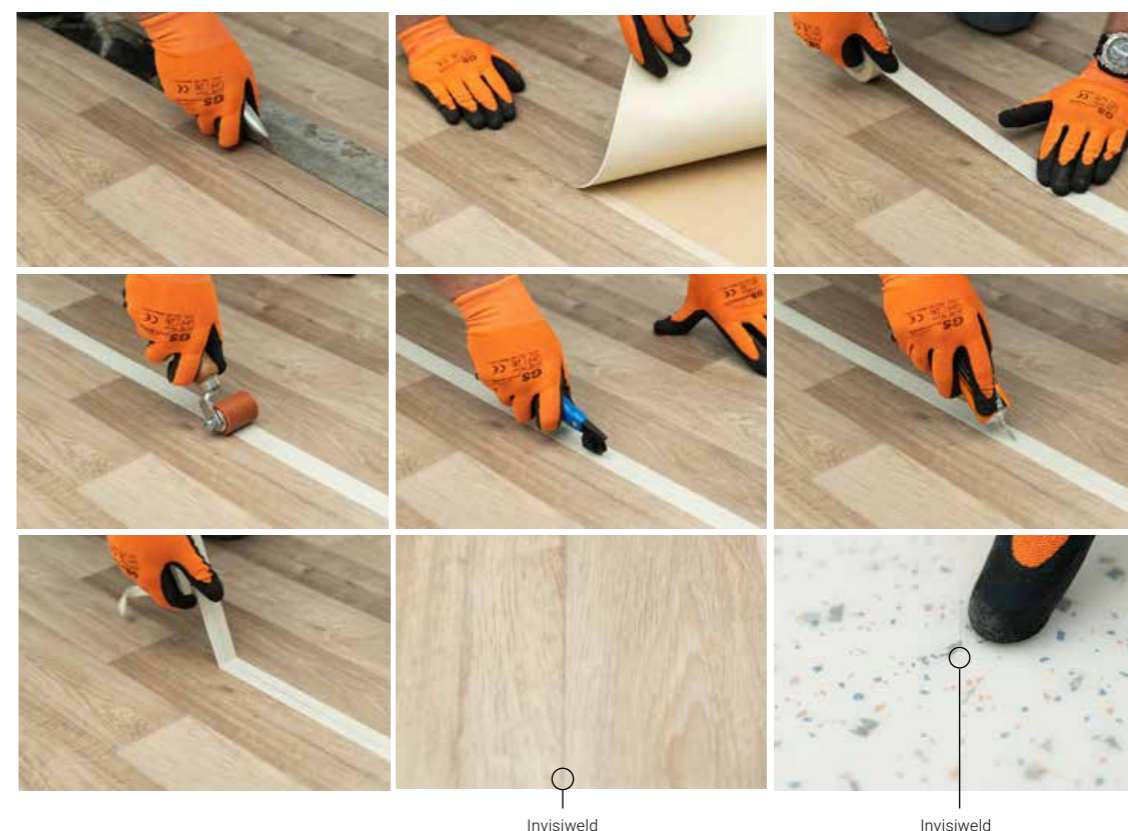

**Order  
starterbox**  
using code  
343928



This is a summary of the full installation instructions. Scan for more details